M G ET

Power Solutions

□ □ □ □ □ □
□

Industry Automation

□ □ □ □ □ □
□ □

New Energy Solutions

□

□ □
□

Home Appliance Control Solutions

Precision Connection

□ □ □ □ □

SHENZHEN MEGMEET ELECTRICAL CO., LTD.

FOLLOW US

Megmeet



MEGMEET

Shenzhen Megmeet Electrical Co., Ltd.(Stock Code:002851) is a one-stop solution provider for the R&D, electronics and automatic control echnology. Company's main business covers six parts: power supply products, industrial automation, new energy vehicle& rail transit, intelligent equipment, smart appliance electronic control and precision connection.

Our company has established a strong platform of R&D, manufacturing, marketing and service with more than 2800 R&D personnel and a total of more than 7800 employees. We have established R&D centers in Shenzhen City, Changsha City, Xi'an City, Wuhan City, Zhuzhou City, Hangzhou City, Taizhou City and Chengdu City; overseas research institutes in the United States, Germany, and Sweden; manufacturing centers in Zhuzhou City, Dongguan City, Heyuan City, Taizhou City, and Yiwu City; overseas factories in Thailand and India; overseas marketing station in the United States, Japan, Korea, Southeast Asia, India, Germany, Poland, Romania, Turkey, Sweden to provide quality service resources.

control and energy saving.



2800+ R&D Personnels

7800+ Workers

10 R&D Centers

8 Manufacturing Bases

Contents

Medium PLC

03/07

KV4. . Qcpgcq
KA6. . . Qcpgcq(
KA4. . . Qcpgcq
KA3. . . Qcpgcq

Small PLC

08/18

KS2. . Qcpgcq
KS1. . Qcpgcq
KS0. . Qcpgcq
KA5. . Qcpgcq
KA06.-KA0. . C Qcpgcq
KA0. . Qcpgcq
KA/. . Qcpgcq

Remote I/O Module

19/20

KP2. . Qcpgcq
KA3. . .Q Qcpgcq

Temperature Controller

21/26

KOR Qcpgcq
KRA-KRAU-KRAT Qcpgcq
KRAC Qcpgcq
KA?Q Qcpgcq
KBR Qcpgcq

Cable List

27

A_`jc Jgqr

HMI


29/30

KX6. . Qcpgcq

MEGMEET

MC8000 Series Medium PLC *

MC8000 series product is a new generation of high-performance and cost-e ective medium PLC based on the mOPAX platform of MEGMEET. It is fully compatible with the IEC61131-3 programming specification and supports LD, ST, SFC, CFC, FBD, and IL programming languages; adopts the blade-type module design, and supports multi-core processor. Based on multi-bus protocols such as EtherCAT and Profinet, a multi-axis motion control system is constructed, to meet the high-speed response requirements of intelligent devices.

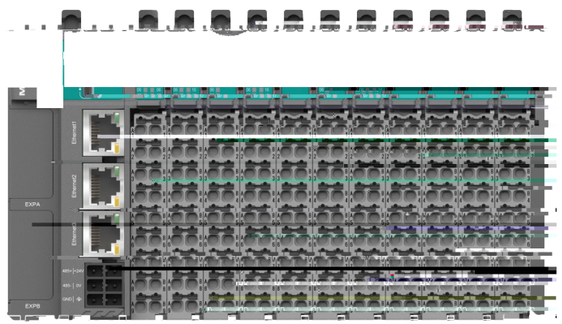

***Developing**
Coming soon

Product Feature

Qrpm l e cvn_ l qgm l $ l cr u mp i g l e

- Expand up to 32 modules, support the expansion of digital, analog, CAN, RS485, RS232, etc.
- Full protocol compatibility, support Modbus/ EtherCAT/EtherNet IP/Profinet and others.

Pcjg_`jw cvacjjc l r ncpdmp k _ l ac

- Four-core A55 processor, communication, logic and algorithm are completely independent.
- 8*200K high-speed input, 8*200K pulse output (single pulse, pulse + direction, AB phase, FWD+REV, etc.)

Npcaggc K sjrg+_vgq am l rpmj

- 1ms/16-axis sync, support 16/32/64-axis EtherCAT control

Djcvg`jc $ am l t c l gc l r mncp_rgm l

- 12mm machine body, saving space
- PUSH In terminal, easily wiring and replacing without tools

Sjrp_+j_pec a_n_agrw

- Support 10M program capacity, 20M data capacity, 512KB retention, for complex logic and data processing

M G T



MEGMEET

Model	Description		Speci cation
	CPU Module		
	IO of Main Module	Number of bus control axis	
MC5200E	Input: 16-channel Output: 16-channel transistor	-	Standard medium module Terminal: cluster terminal
MC5100EA	Input: 4-channel 200K pulse 3-channel 1M differential pulse Output: 4-channel transistor, 6×2M differential pulse channel	-	Pulse main module Terminal: cluster terminal
MC5101EB	Input:8-channel(support 4-channel 200K pulse) Output:8-channel transistor(support 4-channel 200K pulse)	-	Pulse main module Terminal: Euroblock
MC5000E8	Input: 16-channel Output: 16-channel transistor	8-axis EtherCAT	Bus main module Terminal: cluster terminal
MC5000E16	Input: 16-channel Output: 16-channel transistor	16-axis EtherCAT	Bus main module Terminal: cluster terminal
MC5000E32	Input: 16-channel Output: 16-channel transistor	32-axis EtherCAT	Bus main module Terminal: cluster terminal
MC5000E64	Input: 16-channel Output: 16-channel transistor	64-axis EtherCAT	Bus main module Terminal: cluster terminal
MC5001EB8	Input:8-channel(support 4-channel 200K pulse) Output:8-channel transistor(support 4-channel 200K pulse)	8-axis EtherCAT	Bus main module Terminal: Euroblock
MC5001EB16	Input:8-channel(support 4-channel 200K pulse) Output:8-channel transistor(support 4-channel 200K pulse)	16-axis EtherCAT	Bus main module Terminal: Euroblock
MC5001EB32	Input:8-channel(support 4-channel 200K pulse) Output:8-channel transistor(support 4-channel 200K pulse)	32-axis EtherCAT	Bus main module Terminal: Euroblock
MC5001EB64	Input:8-channel(support 4-channel 200K pulse) Output:8-channel transistor(support 4-channel 200K pulse)	64-axis EtherCAT	Bus main module Terminal: Euroblock
MC5000EA8	Input: 4-channel 200K pulse 3-channel 1M differential pulse Output: 4-channel transistor, 6×2M differential pulse channel	8-axis EtherCAT	Bus main module Terminal: cluster terminal
MC5000EA16	Input: 4-channel 200K pulse 3-channel 1M differential pulse Output: 4-channel transistor, 6×2M differential pulse channe		

Input: 4-cha
cn8410.616 0 Td(e)Tj0.615 0 Td(l)Tj0.228 0 Td( )Tj0.308 0 Td(2)Tj0.616 0 Td(0)Tj0.616 0 Td(0)Tj0.616 0 Td(K)Tj0.69 0 Td( )Tj0.308 0 Td(p)Tj0.616 0 Td(u)Tj0.616 0 Td(l)Tj0.231 0 Td(s)Tj0.538 0 Td(e)Tj/C20 1 Tf0.615 0 Td<023C>j/TT0 1 Tf1 0 Td(3)Tj0.615 0 Td(-)Tj0.386 0 Td(c)Tj0.539 0 T
erential pulse channel0.615 0 Td(r)Tj0.385 0 Td(e)Tj0.615 0 Td(n)Tj0.616 0 Td(t)Tj0.385 0 Td(i)Tj0.231 0 Td(a)Tj0.616 0 Td(l)Tj0.227 0 Td( )Tj0.308 0 Td(p)Tj0.616 0 Td(u)Tj0.616 0 Td(i)Tj0.231 0 Td(s)Tj0.538 0 Td27Tj0.616 0 Td(a)Tg5-Tj0.615 0 Td(l3n)Tj0.616 0 Td(e)Tj-7.849 -1.385 Td(T)Tj0.615 0 Td(e)Tj0.615 0 Td(r)Tj0.385 0 Td(m)Tj0.924 0 Td(i)T


Applicable to MC6000/MC5000 basic modules and MC5000S remote IO modules

Power Module		
MP50AC220	Input: 100~240Vac, Output: 24V/2A	AC power module
IO Expansion Module		
MC5000-3232ETN	32-point 24DVC input, 32-point transistor output	Cluster terminal
MC5000-1616ETN	16-point 24DVC input, 16-point transistor output	Cluster terminal
MC5000-3200ENN	32-point 24DVC input	Cluster terminal
MC5000-0032ETN	32-point transistor output	Cluster terminal
MC5000-6400ENN	64-point 24DVC input	Cluster terminal
MC5000-0064ETN	64-point transistor output	Cluster terminal
MC5000-1600ENN-T	16-point 24DVC input	Plug-pull screw terminal
MC5000-0016ERN-T	16-point relay output	Plug-pull screw terminal
MC5000-0016ETN-T	16-point transistor output	Plug-pull screw terminal
MC5000-3200ENN-P	32-point IO input	Euroblock
MC5000-0032ETN-P	32-point IO output	Euroblock
MC5000-1616ETN-PH	16-point 24DVC input, 16-point transistor output (with 4 channels high-speed counter)	Euroblock
MC5000-1600ENN-P	16-point IO input	Euroblock
MC5000-0016ETN-P	16-point IO output	Euroblock
MC5000-0016ERN-P	16-point relay output	Euroblock
MC5000-0014EPN-P	14-point high-side transistor output	Euroblock
Special Function Module		
MC5000-8PO	8-axis 200KHZ pulse output module (1 main module can con gure up to 4, MC5000 only)	Cluster terminal
MC5000-4AD/8AD	4/8-channel analog quantity input module	Plug-pull screw terminal
MC5000-4DA	4-channel analog quantity output module	Plug-pull screw terminal
MC5000-4PT	4-channel thermal resistance temperature module	Plug-pull screw terminal
MC5000-4TC/8TC	4/8-channel thermocouple temperature module	Plug-pull screw terminal
MC5000-2WT*	2-channel weighing module	Plug-pull screw terminal
MC5000-4DA-P	4-channel analog quantity output module	Euroblock
MC5000-6AD-P	6-channel analog quantity input module	Euroblock
MC5000-8TC-P	8-channel thermocouple temperature module	Euroblock
Remote IO Module		
MC5000S-ET	EtherCAT expansion rack	EtherCAT slave station
MC5000S-EIP	EtherNet/IP expansion rack	EtherNet/IP slave station
MC5000S-PN	Pro Net expansion rack	Pro Net slave station
Accessory		
MCA05-100L	1m terminal line	Tieline
MCA05-150L	1.5m terminal line	Tieline
MCA10-40P	40PIN terminal	Wiring terminal

*

MU300 Series Small PLC

E-gear and other control function, to achieve high-speed operation and efficient communication, flexible configuration and

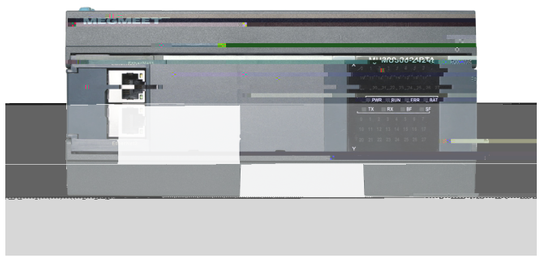

Product Feature

Flexible expansion

-
-

Excellent performance for precise control

-
  significantly improved based on ARM+FPGA
- Support 8-channel 200K high-speed pulse output and single-phase pulse count, or 4-channel 100K AB-phase, CW/CCW, pulse+direction
-

EtherCAT Control

-
  µ
- Communication port: 1*EtherCAT+2*EtherNet,
-

Networking based on multi-communication

-
-
-

Basic Module (AC Power)

Model	Description	Dimensions(mm) LxWxH
MU300-0808BTA16	8-point DC24V input, 8-point transistor output (16 bus axis)	
MU300-0808BTA8	8-point DC24V input, 8-point transistor output (8 bus axis)	
MU300-1210BTA16	12-point DC24V input, 10-point transistor output (16 bus axis)	
MU300-1210BTA8	12-point DC24V input, 10-point transistor output (8 bus axis)	
1		

MU200 Series Small PLC

MU200 new generation of small PLC uses ARM+FPGA dual-core processor for the powerful processing function,



Product Feature

Networking based on multi-communication

-
-
-

Flexible expansion

-
-

Excellent performance for precise control

-
  significantly improved based on ARM+FPGA
- Support up to 12-channel 200K high-speed pulse output
-

~ë Ł łĨëƒĀû łŋĶčŋç Ł Łëíč

- Convenient hardware configuration
-
-
-
-
-

MC700 Series Motion Controller

Basic Module (AC Power)

Model	Description	Dimensions(mm) LxWxH
MU200-4040BTA	40-point DC24V input, 40-point transistor output	246x90x85
MU200-4040BRA	40-point DC24V input, 40-point relay output	
MU200-3232BTA	32-point DC24V input, 32-point transistor output	210x90x85
MU200-3232BRA	32-point DC24V input, 32-point relay output	
MU200-2424BTA	24-point DC24V input, 24-point transistor output	180x90x85
MU200-2424BRA	24-point DC24V input, 24-point relay output	
MU200-1616BTA	16-point DC24V input, 16-point transistor output	145x90x85
MU200-1616BRA	16-point DC24V input, 16-point relay output	

IO Expansion Module Applicable to the basic modules of MU300/MU200 series PLC

Model	Description	Dimensions(mm) LxWxH
MU200-0016ERN	16-point relay output	60x90x85
MU200-0016ETN	16-point transistor output	
MU200-1600ENN	16-point intput	
MU200-0808ERN	8-point DC24V input, 8-point relay output	
MU200-0808ETN	8-point DC24V input, 8-point transistor output	

Special Function Module Applicable to the basic modules of MU300/MU200 series PLC

Model	Description	Dimensions(mm) LxWxH
MU200-4AD	4-channel analog quantity input	60x90x85
MU200-8AD	8-channel analog quantity input	
MU200-4DA	4-channel analog quantity output	
MU200-8TC	8-channel thermocouple	
MU200-4PT	4-channel thermal resistance	

Expansion Card Applicable to the basic modules of MU300/MU200 series PLC

Model	Description	Dimensions(mm) LxWxH
MUE-4X	4-point input	38x46.4x11.5
MUE-4Y	4-point output	
MUE-4XY	2-point input and 2-point output	
MUE-2AD	2-channel analog quantity input	
MUE-2DA	2-channel analog quantity output	
MUE-2AM	1-channel analog quantity input and 1-channel analog quantity output	
MUE-RS232	RS232 communication	
MUE-RS485	RS485 communication	
MUE-CAN	CAN communication	

MEGMEET

MC200 Series Small PLC



Product Feature

High speed and large capacity

- Program capacity: 12K
- μ

Strong expansion capability

-
-
-

High stability and reliability

-
- Input filter protection and power loss protection
-

Excellent communication networking

-
-
-

Reliable program security

-

Basic Module (AC Power)

Model	Speci cation	Dimensions(mm) LxWxH
MC200-2012BRA	20-point 24VDC input, 12-point relay output	158x90x82
MC200-2012BTA	20-point 24VDC input, 12-point transistor output	
MC200-3232BRA	32-point 24VDC input, 32-point relay output	228x90x82
MC200-3232BTA	32-point 24VDC input, 32-point transistor output	
MC200-4040BRA	40-point 24VDC input, 40-point relay output	275x90x82
MC200-4040BTA	40-point 24VDC input, 40-point transistor output	

IO Expansion Module Applicable to the basic modules of MC280/MC200E/MC200 series PLC

Model	Speci cation	Dimensions(mm) LxWxH
MC200-0800ENN	8-point 24VDC input	58x90x82
MC200-1600ENN	16-point 24VDC input	
MC200-0008ERN	8-point relay output	
MC200-0008ETN	8-point transistor output	
MC200-0808ERN	8-point 24VDC input, 8-point relay output	
MC200-0808ETN	8-point 24VDC input, 8-point transistor output	
MC200-0016ERN	16-point relay output	
MC200-0016ETN	16-point transistor output	
MC200-1616ERN	20-point 24VDC input, 12-point relay output	158x90x82
MC200-1616ETN	16-point 24VDC input, 16-point transistor output(Active)	
MC200-1616ERA	16-point 24VDC input, 16-point relay output(Active)	
MC200-1616ETA	16-point 24VDC input, 16-point transistor output(Active)	

Special Function Module Applicable to the basic modules of MC280/MC200E/MC200 series PLC

Model	Speci cation	Dimensions(mm) LxWxH
MC200-2AD MC200-4AD	2-point, 4-point analog quantity input	58x90x82
MC200-2DA MC200-4DA	2-point, 4-point analog quantity output	
MC200-8AD	8-point analog quantity input	
MC200-4AM	2-point analog quantity input, 2-point analog quantity output	
MC200-5AM	4-point analog quantity input, 1-point analog quantity output	
MC200-2TC MC200-4TC	2-point, 4-point thermocouple	
MC200-8TC	8-point thermocouple	
MC200-2PT MC200-4PT	2-point, 4-point thermal resistance	
MC200-2HC	2-channel high-speed count module: single-phase 200K; bi-directional phase 100K; 1-channel pulse following output 20K	

Communication Module Applicable to the basic modules of MC280/MC200E/MC200 series PLC

Model	Speci cation	Dimensions(mm) LxWxH
MC200-CPM	CANopen master communication module	58x90x82
MC200-CAN	CAN communication module	
MC200-RS485	RS485 communication module	
MC200-WEN	Ethernet communication module	


MEGMEET
MC-100-1614BRA1

MQT Series Temperature Controller

modules flexibly and integrating internal intelligent PID algorithm; it has the advantages of cascade, high precision,


Fgef npcagqgml8

Fgef ncpdmpk_lac8

Qrpmle ds larg ml8

Qgknjcglqr_jj_rgml8

Amknjcrc kmbsjc8



tem	ri tin	
P'W ful ly	(-1 %~0%	
ignalin ut	nutyc	hrm ul , , F, N, Pt rall hannl
		hrmalrci tan Pt100、Pt100、u100、N0 rall hannl
	Prii in	hrm ul 0.1 %ull alr+ l m nafin
		hrmalrci tan 0. %ull alr
	amlingyl	m / hannl,100m /8 hannl,100m / hannl
ntrl utut	utuf rm	ranitr utut(ri utut),rlayutut,urrntutut,vltagutut
	ntrlafin	gnual, N, ingP,hating&lingP, ifnr rfinalP
Alarm utut	Alarmf rm	1 alarm,uhau ranlW limitalarm,diafnalarmann.
	utuf rm	ranitran rlayutut(utut tatan irtyntrllyWrifingrgi tf)
	utut hannl	8 hannl
igitalin ut	nuf rm	ranitrin ut
	nut hannl	hannl
ntrlyl		0.1 -10 r1 -100
Auiifin hannl		hannl an 8 hannl
lafin		Nit Wran Wran mmuniatin, Wran hannl, mmuniatinan hannl, hannlan hannl
mmuniatin rt		8 /M u -P/ thN/ thA /Pr fint
nal	Amittm ratur	rking 0~ 0°, trag- 0~ 0°
	Amithumiity	rking 10~ 0%H(n n nafin), king ~ %H(n n nafin)
	Alitu	W000m
	Prtfinl	P0
&		rfrmt F/F/N1 -1 ruinin utriallafin ;F

Kmbcj	?aosgqgrgml af_l lcj	Rc k ncp_rspc aml rpmj msrnsr	?j_p k msrnsr	Glnsr rwnc
M -F	H	M u P/P/F thnt	ran i t r(H)	
M -F	H	M u P/P/F thnt	ran i t r(H)	
M -F	H	F thA 从站	ran i t r(H)	
M -F	H	F thA 从站	ran i t r(H)	
M -	H	M u 8	ran i t r(H)	
M -	H	M u 8	ran i t r(H)	
M -PN	H	Pr fint	ran i t r(H)	
M -PN	H	Pr fint	ran i t r(H)	
Rc k ncp_rspc aml rpmj kmbsjc				
M -	H	M u 8	ran i t r(H)	
M - A	H	M u 8	Anal g(H)	
M -	H	M u 8	ay(H)	
M -	H	M u 8	ran i t r(H)	
M - A	H	M u 8	Anal g(H)	
M - A	H	M u 8	ay(H)	
Cvn_lqgml kmbsjc				
M -8	8-H	8- hannl igitalin ut	-	
M -8	8-H	8- hannl igital utut	igital(8-H)	
M -8	8-H	8- hannl urrnt tfin	-	
M -8M	8-H	- hannl igitalin ut, - hannl igital utut	igital(H)	
M -8A	8-H	8- hannl anal g urrntin ut	-	
M -8A	8-H	8- hannl anal g ltagin ut	-	
M -8A	8-H	8- hannl anal g utut	Anal g(8-H)	

MTC/MTCW/MTCV series products are multi-channel and high-precision temperature controllers, which are suitable for various occasions of temperature control. Its main feature is compatible with TC and RTD, high measure accuracy; high integration (one module supports up to 12 channels of temperature control and 16 channels of measurement), space saving, easy data exchange, remote monitoring, and high cost performance.



Bcbga_rcb qmdr u_pc8	Provide special software - MtcCompanion
Bs_j+N&B ds l argm l 8	Heating&cooling dual-PID control function, 14 alarms like upper and lower limits, deviation, etc
Fge f npcaqqgm l	Intelligent self-tuning and multi-stage temperature setting functions to achieve high-precision temperature control
Ksjrg+u_w am l rpmj	Integrated multi-channel temperature control to centralize data management
C_qw cva f_ l ec	Data exchange easily between thermostat and PLC, thermostat and HMI, thermostat and computer through Ethernet and serial port

t m	ri t n	
P u ly	(-1 % ~ 0%	
ignal in ut	n utty	
	Pr i i n	h m u l
	am lin y l	
	ut uf rm	
ntr l ut ut	ntr la fi n	
	Alarmf rm	
Alarm ut ut	ut uf rm	
	ut ut hann l	
in ut	n uf rm	
	n ut hann l	
ntr ly l		
A ui i fi n hann l		
la fi n		
mmuni a fi n rt		
	Am i nt m a tur	
	Am i nthumi ity	
	Alti u	
	Pr t fi nl l	
&	rf rm t 1 -1(ru in in u trial a fi n u 1010-1; u	

MTCE series product, as a multi-channel high-precision EtherCAT temperature controller, are adapted to various mainstream master stations. Its main feature is compatible with thermocouples and thermal resistors, high measurement accuracy, feature-rich, user-friendly. It has the characteristics of high integration, space saving, easy data exchange, remote monitoring, and high cost performance.

Lcrumpigle a_n_agrw

F th A

Ma ur a ura y full al f ±0.1 % ntr la ura y ±0 °

0.1 am ling y l an 1m yn hr niza ti n y l a ing m ul an
a a P ntr lan im l d gi a ti n, an m nitr anal g alu



tem	ri ti n		
	(-1 % ~0%		

MZ800 Series Human Machine Interface



Picture					
Model/Series	MZ800-TT210SK30W	MZ800-TT215SK31	MZ800-TT07SK31M	MZ800-TT210SK31M	MZ800-TT22P
Display size					